METRIC 555-6993

RECOMMENDED ELECTRICAL STUB-UP

(HIGH VOLTAGE STUB-UP)
AC LOAD LEAD CONDUIT FOR
PERMANENT MAGNET EXCITATION
CONNECTION BOX

(LOW VOLTAGE STUB-UP)

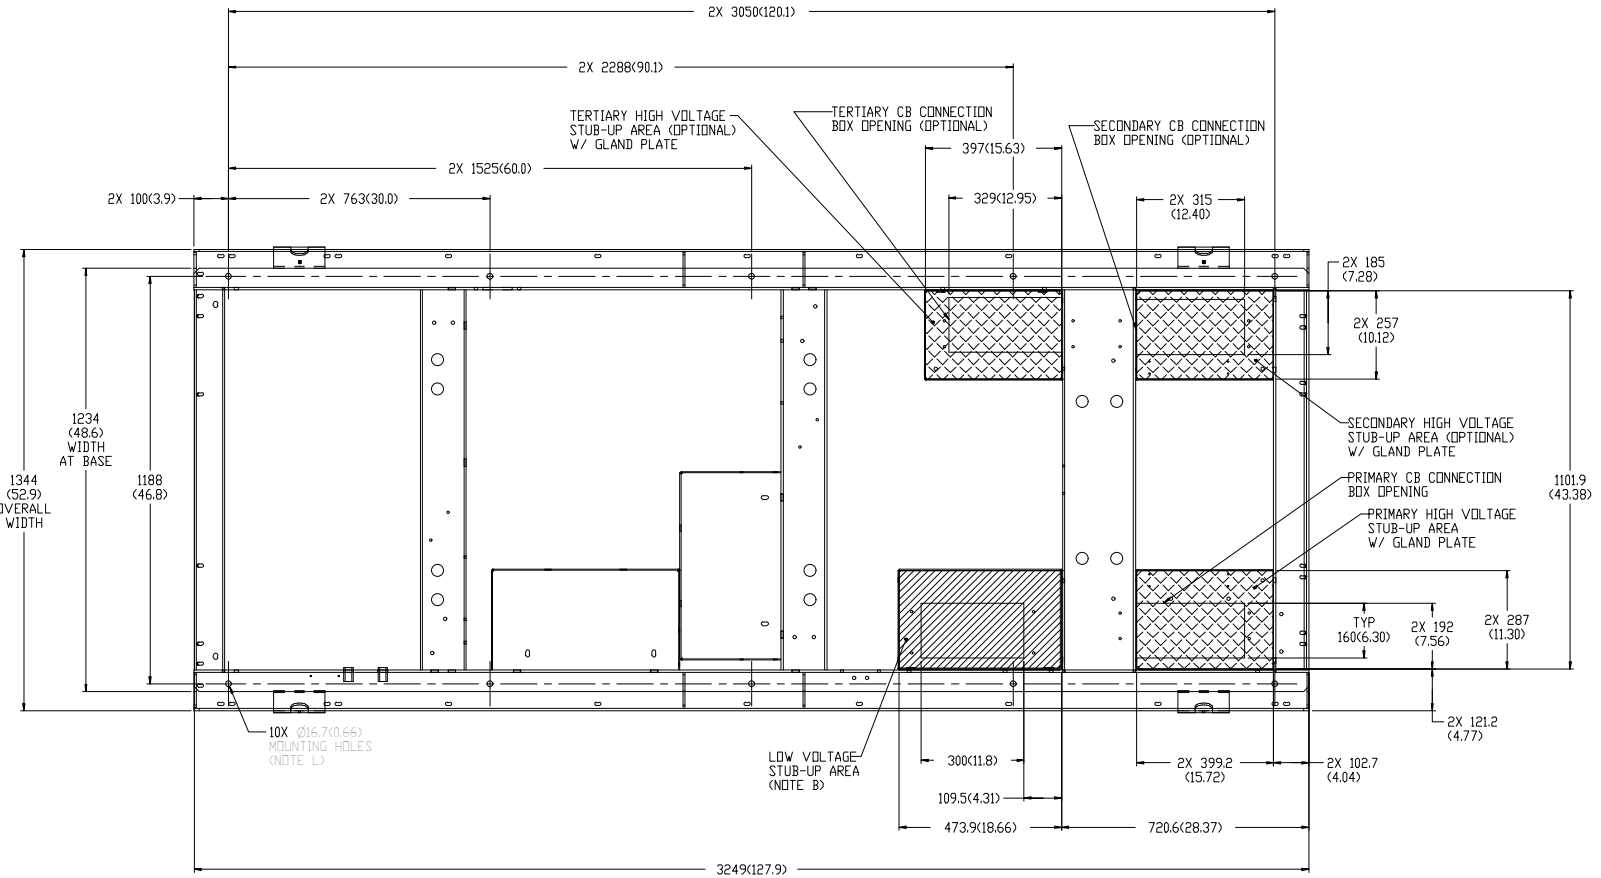

OPEN SET, L1 AND L2 ENCLOSURES STUB-UP VIEW

FOR NOTES SEE SHEET 1

(SCALE: 1:15)

1ES167A	INT-PROP
1E2966B	IDENT
1E2722D	DRAWING
1E0198V	BRAND MARKINGS
1E0013Y	CONFIDENTIALITY
1E0012A	INTERPRETATION
1E0011	INTPR & TOL

Caterpillar: Confidential Yellow

PROD. | OTHER: RECORDS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm DIMENSIONS W/O TOL ARE BASIC

VERSION: TYPE: PRIMARY X SECONDARY

THIRD ANGLE PROJECTION

SHEET 2 OF 4

DAC CONTROL: W923

CATERPILLAR

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE THE PROPRIETARY PROPERTY OF CATERPILLAR AND ARE LOANED SUBJECT TO AGREEMENT THAT THEY SHALL NOT BE REPRODUCED, COPIED OR USED IN WHOLE OR IN PART, NOR LOANED OR DISCLOSED TO ANY UNAUTHORIZED PERSON WITHOUT THE PRIOR WRITTEN PERMISSION OF CATERPILLAR INC. IN INFRINGEMENT OF COPYRIGHT LAWS.

INSTALLATION
(14.2 L OPEN)

555-6993 VER - DIG 04 E