METRIC 555-6993

RECOMMENDED ELECTRICAL STUB-UP

(HIGH VOLTAGE STUB-UP)
AC LOAD LEAD CONDUIT FOR PERMANENT MAGNET EXCITATION CONNECTION BOX

(LOW VOLTAGE STUB-UP)

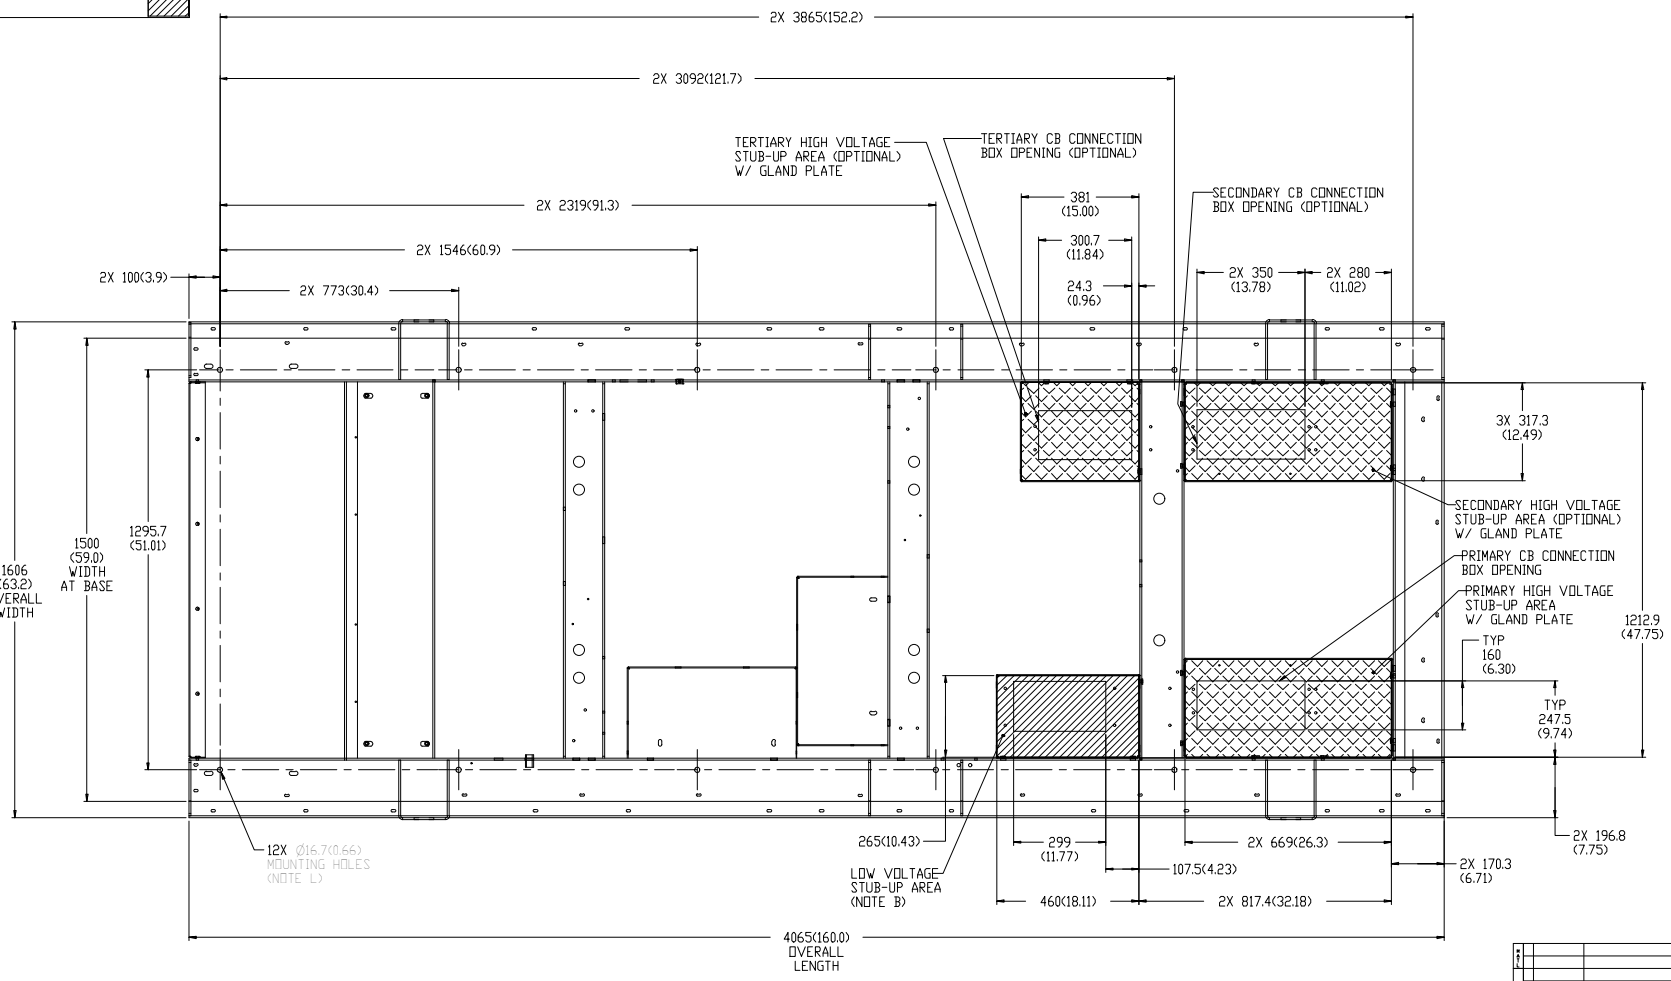

L3 ENCLOSURE STUB-UP VIEW

FOR NOTES SEE SHEET 1

(SCALE: 1:15)

1ES167A	INT-PROP
1E2966B	IDENT
1E2722D	DRAWING
1E0198V	BRAND MARKINGS
1E0013Y	CONFIDENTIALITY
1E0012A	INTERPRETATION
1E0011	INTPR & TOL

Caterpillar: Confidential Yellow

PROD | OTHER: RECORDS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm DIMENSIONS W/O TOL ARE BASIC

TOLERANCING TYPE: PRIMARY X, SECONDARY

THIRD ANGLE PROJECTION

SHEET 3 OF 4

DWG CONTROL W923

CATERPILLAR

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CATERPILLAR. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR IS PROHIBITED.

INSTALLATION

(14.2 L OPEN)

555-6993 VER - DOC 04 E